


112-C series

PIN HEADER SMT WITH LOCATING

PEG 1.27mm(0.050")

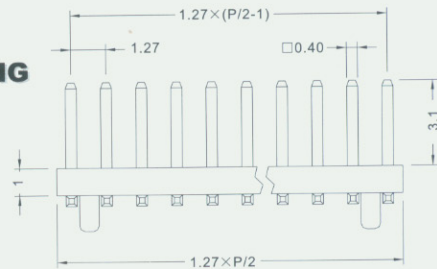

Specifications:

Current Rating: 1AMP

Contact Resistance: 30mΩ max.at DC 100 mA

Insulator Resistance: 1000MΩ min.at DC 500V

Voltage: AC 500V For 1 minute

Operating Temperature: -55° C--+105° C

Material:

Contact: Phosphor Bronze

Housing: Nylon-6T&30% Glass Fible (UL94V-0)

How To Order

112-C -40 G 085

